



Commercial Stainless Steel Freezer / Chiller Product Catalogue



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com

f **Rotaryana Prima** @ **Rotaryana**
<http://www.rotaryana.com/>

We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold. **Check www.rotaryana.com for updates.**

Upright Freezer / Chiller

Delicate design with powerful function.
An ideal cooling storage partner in your kitchen.

NEW

LED Lighting System

Long life-time, low heat emission LED lighting is installed, with more energy saving.

NEW

New Design Display Panel

New design rectangular display panel offers a clear platform to demonstrate all operating condition.



Optional

Standard come with resin legs, optional interchange with wheels.



Satisfying Usability

A firm durability for professional users. High accurate temperature control by Micro-computer and also seeking after the appearance beauty.

Auto-Defrost



Before Defrost Process




After Defrost Process

Built-in Automatic Drainage Evaporator



LED Lighting System

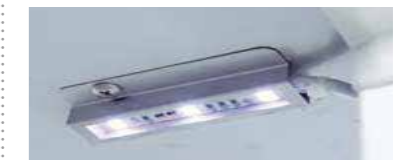

LED lighting is installed in internal compartment for better vision and make food in / out more easy.

Whole Body Foam Insulation Structure

CFC-free Thermal Insulator

Including the partition, the whole body foam insulated to strengthen and improve thermal insulation. Ozone depletion potential (ODP) is zero and CFC-free thermal insulator made with "Cyclopentane" foaming leads to a eco-friendly product.



Stopper Rack Prevent Overloading

A stopper is installed on the rack to prevent overload, which allows a smooth air circulation inside the refrigerator and maximize cooling performance.



Thermal Insulated Door-back / Gasket

Improved door-back and gasket enhance thermal insulation performance.



Easy Maintenance

An easy, simple action of maintenance will help to increase the duration of refrigerator life-time.

Clear Coating Stainless Steel

Clear Coating Stainless Steel is applied on the doors and the front cover. Improved water repellency, oil repellency performance allow user to clean stains from foods, fingerprints on the surface easily.



Curved Edges Design

All Edges and corners in the compartment are design as curved for easy cleaning.



Flip-up Front Cover

Improved materials will make it even easier to keep the refrigerator clean and in good hygienic condition.



Embedded Gasket

Easy for user to install the gasket



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com



f Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>

We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold. Check www.rotaryana.com for updates.

Upright Refrigerator (D=650mm)

Upright Freezer (D=650mm)



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UC62N
404 L
(W)625 x (D)650 x (H)1990mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UF62N
404 L
(W)625 x (D)650 x (H)1990mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UC70N
467 L
(W)700 x (D)650 x (H)1990mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UF70N
467 L
(W)700 x (D)650 x (H)1990mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UC120N
865 L
(W)1200 x (D)650 x (H)1990mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UF120N
855 L
(W)1200x (D)650x (H)1990mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UC180N
1340 L
(W)1800 x (D)650 x (H)1990mm
1540W / 7A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UF180N
1332 L
(W)1800 x (D)800 x (H)1990mm
2200W / 10A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com



f Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>

Upright Refrigerator (D=800mm)

Upright Freezer (D=800mm)



JC-UC62
 Net capacity (L) 498 L
 Dimension (mm) (W)625 x (D)800 x (H)1990mm
 Electrical supply 880W / 4A
 Electrical capacity 1 Phase, 220-240V, 50/60Hz
 Refrigerant R290
 Temperature -6°C to 12°C



JC-UF62
 Net capacity (L) 498 L
 Dimension (mm) (W)625 x (D)800 x (H)1990mm
 Electrical supply 1100W / 5A
 Electrical capacity 1 Phase, 220-240V, 50/60Hz
 Refrigerant R290
 Temperature -23°C to -7°C



JC-UC70
 Net capacity (L) 589 L
 Dimension (mm) (W)700 x (D)800 x (H)1990mm
 Electrical supply 880W / 4A
 Electrical capacity 1 Phase, 220-240V, 50/60Hz
 Refrigerant R290
 Temperature -6°C to 12°C



JC-UF70
 Net capacity (L) 589 L
 Dimension (mm) (W)700 x (D)800 x (H)1990mm
 Electrical supply 1100W / 5A
 Electrical capacity 1 Phase, 220-240V, 50/60Hz
 Refrigerant R290
 Temperature -23°C to -7°C



JC-UC120
 Net capacity (L) 1099 L
 Dimension (mm) (W)1200 x (D)800 x (H)1990mm
 Electrical supply 1100W / 5A
 Electrical capacity 1 Phase, 220-240V, 50/60Hz
 Refrigerant R290
 Temperature -6°C to 12°C



JC-UF120
 Net capacity (L) 1092 L
 Dimension (mm) (W)1200x (D)800x (H)1990mm
 Electrical supply 1100W / 5A
 Electrical capacity 1 Phase, 220-240V, 50/60Hz
 Refrigerant R290
 Temperature -23°C to -7°C



JC-UC180
 Net capacity (L) 1710 L
 Dimension (mm) (W)1800 x (D)800 x (H)1990mm
 Electrical supply 1540W / 7A
 Electrical capacity 1 Phase, 220-240V, 50/60Hz
 Refrigerant R290
 Temperature -6°C to 12°C



JC-UF180
 Net capacity (L) 1702 L
 Dimension (mm) (W)1800 x (D)800 x (H)1990mm
 Electrical supply 2200W / 10A
 Electrical capacity 1 Phase, 220-240V, 50/60Hz
 Refrigerant R290
 Temperature -23°C to -7°C



PT Rotaryana Prima
 Teuku cik ditiro 16 Jakarta, 10350
 call +6221.310.6767 fax +6221.310.2256
 management@rotaryana.com



f Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>

We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold. Check www.rotaryana.com for updates.

Upright Duel Temp. Refrigerator



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UCF62
Chiller: 233L / Freezer: 253L
(W)625 x (D)800 x (H)1990mm
1540W / 7A
1 Phase, 220-240V, 50/60Hz
R290
Chiller: 2°C to 6°C / Freezer: -20°C to -16°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UCF70
Chiller: 255L / Freezer: 275L
(W)700 x (D)800 x (H)1990mm
1540W / 7A
1 Phase, 220-240V, 50/60Hz
R290
Chiller: 2°C to 6°C / Freezer: -20°C to -16°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UCF120
Chiller: 472L / Freezer: 517L
(W)1200 x (D)800 x (H)1990mm
1980W / 9A
1 Phase, 220-240V, 50/60Hz
R290
Chiller: -6°C to 12°C / Freezer: -22°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UCF180
Chiller: 1025L / Freezer: 498L
(W)1800 x (D)800 x (H)1990mm
1980W / 9A
1 Phase, 220-240V, 50/60Hz
R290
Chiller: -6°C to 12°C / Freezer: -22°C to -7°C



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com



f Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>

We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold. Check www.rotaryana.com for updates.

Upright Refrigerator (Bakery Tray Version)

Upright Freezer (Bakery Tray Version)



No.of Tray
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UC62B

13 pcs
(W)625 x (D)800 x (H)1990mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



No.of Tray
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UF62B

13 pcs
(W)625 x (D)800 x (H)1990mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



No.of Tray
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UC120B

26 pcs
(W)1200 x (D)800 x (H)1990mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



No.of Tray
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UF120B

26 pcs
(W)1200 x (D)800 x (H)1990mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



No.of Tray
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UC180B

39 pcs
(W)1800 x (D)800 x (H)1990mm
1540W / 7A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



No.of Tray
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-UF180B

39 pcs
(W)1800 x (D)800 x (H)1990mm
2200W / 10A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com



Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>

Undercounter Freezer / Chiller

Recreated for easy to use with maximum performance



NEW

New Design Display Panel

New design rectangular display panel offers a clear platform to demonstrate all operating condition.

NEW

Enhanced Worktop

Enhanced strength of the structure with excellent thermal insulation performance

NEW

Easy Removeable Air Filter

Air filter protects condenser from dust is allocated just under the front cover, which is easy to take off / put on after cleaning.

NEW

LED Lighting System

Long life-time, low heat emission LED lighting is installed, with more energy saving.

Easy to Use

Simple, Powerful, Reliable!

Front Exhaust, Front Intake

Exhaust and intake port are designed on the front. Other equipments can install just next to the refrigerator.



Auto-Defrost



Before Defrost Process



After Defrost Process

Top Table Curved Edge Easy to Drain

The curved top table allows drain water off the table much easier without stains the door gasket.



High Thermal Insulation Performance Door-back / Gasket

With improved door-back and gasket, enhance and maximize the level of thermal insulation.



LED Lighting System

LED lighting is installed in internal compartment for better vision and make food in / out more easy.



Easy Maintenance

Designed to easily clean or maintain the machine.

Clear Coating Stainless Steel


Clear Coating Stainless Steel is applied on the doors and the front cover. Improved water repellency, oil repellency performance allow user to clean stains from foods, fingerprints on the surface easily.

Improved materials will make it even easier to keep the refrigerator clean and in good hygienic condition.



Micro-computer Controlled & Digital Display

Adapted Micro-computer control method that can set the temperature in 1 degree celsius increments depends on storage items.



Optional Wheels for Easy Movement

Optional

Standard come with resin legs, optional interchange with wheels.



Refrigerant Gas Filling Port

Installed port is highly convenient for maintainance activities, e.g. checking the volume of refrigerant gas; or filling refrigerant; and collecting stored gas whenever needed.



Easy to Replace Gasket

Inlay type design for easy installation.



Curved Edges Design

All Edges and corners in the compartment are design as curved for easy cleaning.



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com



f Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>

We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold. Check www.rotaryana.com for updates.

Worktop Refrigerator (D=600mm)

Worktop Freezer (D=600mm)



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-90-60

132 L
(W)900 x (D)600 x (H)800mm
616W / 2.8A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-90-60

132 L
(W)900 x (D)600 x (H)800mm
770W / 3.5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-120-60

218 L
(W)1200 x (D)600 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-120-60

218 L
(W)1200 x (D)600 x (H)800mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-150-60

302 L
(W)1500 x (D)600 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-150-60

302 L
(W)1500 x (D)600 x (H)800mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-180-60

388 L
(W)1800 x (D)600 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-180-60

388 L
(W)1800 x (D)600 x (H)800mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com



f Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>

Worktop Refrigerator (D=700mm)

Worktop Freezer (D=700mm)



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-90-70
164 L
(W)900 x (D)700 x (H)800mm
616W / 2.8A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-90-70
164 L
(W)900 x (D)700 x (H)800mm
770W / 3.5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-120-70
266 L
(W)1200 x (D)700 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-120-70
266 L
(W)1200 x (D)700 x (H)800mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-150-70
368 L
(W)1500 x (D)700 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-150-70
368 L
(W)1500 x (D)700 x (H)800mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-180-70
472 L
(W)1800 x (D)700 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-180-70
472 L
(W)1800 x (D)700 x (H)800mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com



f Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>

Worktop Refrigerator (D=750mm)

Worktop Freezer (D=750mm)



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-90-75
180 L
(W)900 x (D)750 x (H)800mm
616W / 2.8A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-90-75
180 L
(W)900 x (D)750 x (H)800mm
770W / 3.5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-120-75
290 L
(W)1200 x (D)750 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-120-75
290 L
(W)1200 x (D)750 x (H)800mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-150-75
401 L
(W)1500 x (D)750 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-150-75
401 L
(W)1500 x (D)750 x (H)800mm
880W / 4A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CC-180-75
514 L
(W)1800 x (D)750 x (H)800mm
660W / 3A
1 Phase, 220-240V, 50/60Hz
R290
-6°C to 12°C



Net capacity (L)
Dimension (mm)
Electrical supply
Electrical capacity
Refrigerant
Temperature

JC-CF-180-75
514 L
(W)1800 x (D)750 x (H)800mm
1100W / 5A
1 Phase, 220-240V, 50/60Hz
R290
-23°C to -7°C



PT Rotaryana Prima
Teuku cik ditiro 16 Jakarta, 10350
call +6221.310.6767 fax +6221.310.2256
management@rotaryana.com



f Rotaryana Prima @ Rotaryana
<http://www.rotaryana.com/>