

# Upright Dual Temp. Refrigerator



## Commercial Stainless Steel Freezer / Chiller Product Catalogue



**PT Rotaryana Prima**  
Teuku cik ditiro 16 Jakarta, 10350  
call +6221.310.6767 fax +6221.310.2256  
management@rotaryana.com

Rotaryana Prima @ Rotaryana  
<http://www.rotaryana.com/>

We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold. Check [www.rotaryana.com](http://www.rotaryana.com) for updates.

# Upright Freezer / Chiller

Delicate design with powerful function.  
An ideal cooling storage partner in your kitchen.

NEW

## LED Lighting System

Long life-time, low heat emission  
LED lighting is installed, with more  
energy saving.

NEW

## New Design Display Panel

New design rectangular display panel  
offers a clear platform to demonstrate  
all operating condition.



## Optional

Standard come with resin legs,  
optional interchange with wheels.



## Satisfying Usability

A firm durability for professional users. High accurate temperature control by  
Micro-computer and also seeking after the appearance beauty.

### Auto-Defrost



Before Defrost Process




After Defrost Process

### Built-in Automatic Drainage Evaporator



### LED Lighting System

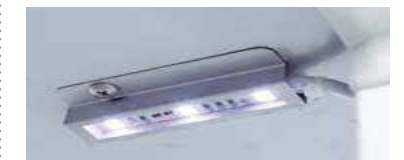

LED lighting is installed in internal compartment for  
better vision and make food in / out more easy.

### Whole Body Foam Insulation Structure

CFC-free Thermal Insulator

Including the partition, the whole  
body foam insulated to strengthen  
and improve thermal insulation.  
Ozone depletion potential (ODP)  
is zero and CFC-free thermal  
insulator made with "Cyclopentane"  
foaming leads to a eco-friendly  
product.



### Stopper Rack Prevent Overloading

A stopper is installed on the rack to prevent  
overload, which allows a smooth air circulation  
inside the refrigerator and maximize cooling  
performance.



### Thermal Insulated Door-back / Gasket

Improved door-back and gasket enhance thermal  
insulation performance.



## Easy Maintenance

An easy, simple action of maintenance will help to incurease the duration of refrigerator life-time.

### Clear Coating Stainless Steel

Clear Coating Stainless Steel is applied on the  
doors and the front cover. Improved water  
repellency, oil repellency performance allow user  
to clean stains from foods, fingerprints on the  
surface easily.



### Curved Edges Design

All Edges and corners in the compartment  
are design as curved for easy cleaning.



### Flip-up Front Cover

Improved materials will make it even easier to  
keep the refrigerator clean and in good hygienic  
condition.



### Embedded Gasket

Easy for user to install the gasket



**PT Rotaryana Prima**  
Teuku cik ditiro 16 Jakarta, 10350  
call +6221.310.6767 fax +6221.310.2256  
management@rotaryana.com



f Rotaryana Prima @ Rotaryana  
<http://www.rotaryana.com/>

We reserve the right to change specifications appearing in this bulletin without incurring any obligation  
for equipment previously or subsequently sold. Check [www.rotaryana.com](http://www.rotaryana.com) for updates.

## Upright Refrigerator (D=800mm)



Net capacity (L)  
Dimension (mm)  
Electrical supply  
Electrical capacity  
Refrigerant  
Temperature

**JC-UC70**  
589 L  
(W)700 x (D)800 x (H)1990mm  
880W / 4A  
1 Phase, 220-240V, 50/60Hz  
R290  
-6°C to 12°C



Net capacity (L)  
Dimension (mm)  
Electrical supply  
Electrical capacity  
Refrigerant  
Temperature

**JC-UC120**  
1099 L  
(W)1200 x (D)800 x (H)1990mm  
1100W / 5A  
1 Phase, 220-240V, 50/60Hz  
R290  
-6°C to 12°C

## Upright Freezer (D=800mm)



Net capacity (L)  
Dimension (mm)  
Electrical supply  
Electrical capacity  
Refrigerant  
Temperature

**JC-UF70**  
589 L  
(W)700 x (D)800 x (H)1990mm  
1100W / 5A  
1 Phase, 220-240V, 50/60Hz  
R290  
-23°C to -7°C



Net capacity (L)  
Dimension (mm)  
Electrical supply  
Electrical capacity  
Refrigerant  
Temperature

**JC-UF120**  
1092 L  
(W)1200x (D)800x (H)1990mm  
1100W / 5A  
1 Phase, 220-240V, 50/60Hz  
R290  
-23°C to -7°C



**PT Rotaryana Prima**  
Teuku cik ditiro 16 Jakarta, 10350  
call +6221.310.6767 fax +6221.310.2256  
management@rotaryana.com



Rotaryana Prima @ Rotaryana  
<http://www.rotaryana.com/>



# Undercounter Freezer / Chiller

Recreated for easy to use with maximum performance



Easy to Use

Simple, Powerful, Reliable!

## Front Exhaust, Front Intake

Exhaust and intake port are designed on the front. Other equipments can install just next to the refrigerator.



## Auto-Defrost



Before Defrost Process



After Defrost Process

## Top Table Curved Edge Easy to Drain

The curved top table allows drain water off the table much easier without stains the door gasket.



## High Thermal Insulation Performance Door-back / Gasket

With improved door-back and gasket, enhance and maximize the level of thermal insulation.



## LED Lighting System

LED lighting is installed in internal compartment for better vision and make food in / out more easy.



Easy Maintenance

Designed to easily clean or maintain the machine.

## Clear Coating Stainless Steel

Clear Coating Stainless Steel is applied on the doors and the front cover. Improved water repellency, oil repellency performance allow user to clean stains from foods, fingerprints on the surface easily.

Improved materials will make it even easier to keep the refrigerator clean and in good hygienic condition.



## Micro-computer Controlled & Digital Display

Adapted Micro-computer control method that can set the temperature in 1 degree celsius increments depends on storage items.



## Optional Wheels for Easy Movement

### Optional

Standard come with resin legs, optional interchange with wheels.



## Refrigerant Gas Filling Port

Installed port is highly convenient for maintenance activities, e.g. checking the volume of refrigerant gas; or filling refrigerant; and collecting stored gas whenever needed.



## Easy to Replace Gasket

Inlay type design for easy installation.



## Curved Edges Design

All Edges and corners in the compartment are design as curved for easy cleaning.



**PT Rotaryana Prima**  
Teuku cik ditiro 16 Jakarta, 10350  
call +6221.310.6767 fax +6221.310.2256  
management@rotaryana.com



f Rotaryana Prima @ Rotaryana  
<http://www.rotaryana.com/>

We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold. Check [www.rotaryana.com](http://www.rotaryana.com) for updates.

## Worktop Refrigerator (D=600mm)



Net capacity (L)  
Dimension (mm)  
Electrical supply  
Electrical capacity  
Refrigerant  
Temperature

**JC-CC-120-60**  
218 L  
(W)1200 x (D)600 x (H)800mm  
660W / 3A  
1 Phase, 220-240V, 50/60Hz  
R290  
-6°C to 12°C



Net capacity (L)  
Dimension (mm)  
Electrical supply  
Electrical capacity  
Refrigerant  
Temperature

**JC-CC-150-60**  
302 L  
(W)1500 x (D)600 x (H)800mm  
660W / 3A  
1 Phase, 220-240V, 50/60Hz  
R290  
-6°C to 12°C

## Worktop Freezer (D=600mm)



Net capacity (L)  
Dimension (mm)  
Electrical supply  
Electrical capacity  
Refrigerant  
Temperature

**JC-CF-120-60**  
218 L  
(W)1200 x (D)600 x (H)800mm  
880W / 4A  
1 Phase, 220-240V, 50/60Hz  
R290  
-23°C to -7°C



Net capacity (L)  
Dimension (mm)  
Electrical supply  
Electrical capacity  
Refrigerant  
Temperature

**JC-CF-150-60**  
302 L  
(W)1500 x (D)600 x (H)800mm  
880W / 4A  
1 Phase, 220-240V, 50/60Hz  
R290  
-23°C to -7°C



**PT Rotaryana Prima**  
Teuku cik ditiro 16 Jakarta, 10350  
call +6221.310.6767 fax +6221.310.2256  
management@rotaryana.com



f Rotaryana Prima @ Rotaryana  
<http://www.rotaryana.com/>

# Worktop Refrigerator (D=700mm)

# Worktop Freezer (D=700mm)



**JC-CC-90-70**  
 Net capacity (L) 164 L  
 Dimension (mm) (W)900 x (D)700 x (H)800mm  
 Electrical supply 616W / 2.8A  
 Electrical capacity 1 Phase, 220-240V, 50/60Hz  
 Refrigerant R290  
 Temperature -6°C to 12°C



**JC-CF-90-70**  
 Net capacity (L) 164 L  
 Dimension (mm) (W)900 x (D)700 x (H)800mm  
 Electrical supply 770W / 3.5A  
 Electrical capacity 1 Phase, 220-240V, 50/60Hz  
 Refrigerant R290  
 Temperature -23°C to -7°C



**JC-CC-120-70**  
 Net capacity (L) 266 L  
 Dimension (mm) (W)1200 x (D)700 x (H)800mm  
 Electrical supply 660W / 3A  
 Electrical capacity 1 Phase, 220-240V, 50/60Hz  
 Refrigerant R290  
 Temperature -6°C to 12°C



**JC-CF-120-70**  
 Net capacity (L) 266 L  
 Dimension (mm) (W)1200 x (D)700 x (H)800mm  
 Electrical supply 880W / 4A  
 Electrical capacity 1 Phase, 220-240V, 50/60Hz  
 Refrigerant R290  
 Temperature -23°C to -7°C



**JC-CC-150-70**  
 Net capacity (L) 368 L  
 Dimension (mm) (W)1500 x (D)700 x (H)800mm  
 Electrical supply 660W / 3A  
 Electrical capacity 1 Phase, 220-240V, 50/60Hz  
 Refrigerant R290  
 Temperature -6°C to 12°C



**JC-CF-150-70**  
 Net capacity (L) 368 L  
 Dimension (mm) (W)1500 x (D)700 x (H)800mm  
 Electrical supply 880W / 4A  
 Electrical capacity 1 Phase, 220-240V, 50/60Hz  
 Refrigerant R290  
 Temperature -23°C to -7°C



**JC-CC-180-70**  
 Net capacity (L) 472 L  
 Dimension (mm) (W)1800 x (D)700 x (H)800mm  
 Electrical supply 660W / 3A  
 Electrical capacity 1 Phase, 220-240V, 50/60Hz  
 Refrigerant R290  
 Temperature -6°C to 12°C



**JC-CF-180-70**  
 Net capacity (L) 472 L  
 Dimension (mm) (W)1800 x (D)700 x (H)800mm  
 Electrical supply 1100W / 5A  
 Electrical capacity 1 Phase, 220-240V, 50/60Hz  
 Refrigerant R290  
 Temperature -23°C to -7°C



**PT Rotaryana Prima**  
 Teuku cik ditiro 16 Jakarta, 10350  
 call +6221.310.6767 fax +6221.310.2256  
 management@rotaryana.com



f Rotaryana Prima @ Rotaryana  
<http://www.rotaryana.com/>